


### TYPE - TF

Size TF	RATING			Outside Dia.	Boss Dia.	Length Thru' Bore	DBSE Min.	Max. Bore
	KW / RPM	Torque KNm	Max RPM					
TF 0027	0.027	0.26	8000	82	63	40	70	35
TF 0038	0.038	0.36	7000	101	78.5	45	70	45
TF 0140	0.140	1.34	6000	127	101	75	95	70
TF 0260	0.260	2.48	6000	149	117	85	110	85
TF 0400	0.40	3.82	6000	176	144	105	140	105
TF 0750	0.75	7.16	6000	203	166	120	165	120
TF 1250	1.25	11.9	5000	241	199	145	190	145
TF 2000	2.00	19.1	4000	283	235	170	210	170
TF 3000	3.00	28.6	3500	335	280	200	235	200



### TYPE - DF

Size DF	RATING			Outside Dia.	Boss Dia.	Length Thru' Bore	DBSE Min.	Max. Bore
	KW / RPM	Torque KNm	Max RPM					
DF 0040	0.040	0.380	20000	82	63	50	70	50
DF 0045	0.045	0.430	18000	101	78.5	65	70	65
DF 0180	0.180	1.720	15000	127	101	80	95	80
DF 0310	0.310	2.960	12000	149	117	95	110	95
DF 0500	0.500	4.779	10500	176	144	115	140	115
DF 0980	0.980	9.360	9000	203	166	130	165	130
DF 1840	1.840	17.570	7800	241	199	160	190	160
DF 2550	2.550	24.350	6500	283	235	190	210	190
DF 3900	3.900	37.249	5700	335	280	220	235	220

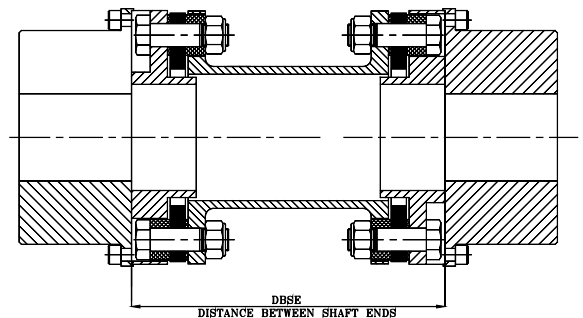

- All dimensions are in mm.
- DBSE variations are available to suit customer's requirements. Pl. Refer to RATHI.
- Momentary overload of 1.75 x stated ratings and shock loads of 2.7 x stated rating are permitted.
- Maximum speeds shown are for standard design & materials. Higher speed may be possible. Consult RATHI.
- Balancing to G 6.3 is standard. G 2.5 is available on request.
- Maximum bores are suitable for hydraulic fit.
- Large hubs are available for size TF 0027, TF 0038, TF 0140 & DF 0040, DF 0045, DF 0180..

- In view of our constant endeavour to improve quality of our products, we reserve the right to alter or change specifications without prior notice.
- This document is the intellectual property of Rathi Transpower Pvt. Ltd. and subject to copyright.



#### Rathi Transpower Pvt Ltd

Rathi Chambers, 7, Deccan College Road,  
Pune 411 006.  
Phone : 91-20-30517200  
Fax : 91-20-30517212  
E-mail : info@rathigroup.com  
Website : www.rathicouplings.com